



NEXLER Termoklej

Heat weldable under layer bituminous felt

TECHNICAL DATA

Type of reinforcement	non-woven polyester reinforced with glass fibers
Coating on the top side	asphalt adhesive strips covered with PE foil
Low temperature flexibility	≤ -10°C
Width	≥ 0,99 m
Straightforwardness	≤ 20 mm per 10 m roll length
Thickness	(2,5 ± 0,2) mm
Resistance to external fire exposure* *applies to the examined layer systems	B _{roof} (t ₁)
Reaction to fire	class E
Watertightness: waterproof at a pressure of	2 kPa (method A) 10 kPa (method A)
Tensile properties during stretching: - longitudinal elongation - transversal elongation	600 ± 200 N/50 mm (50 ± 15) % 450 ± 200 N/50 mm (50 ± 15) %
Resistance to root penetration	NPD
Resistance to impact	≥ 1000 mm (method A)
Resistance to tearing: - longitudinal - transversal	200 ± 150 N 300 ± 150 N
Resistance of the joint: - shear strength • longitudinal joint • transversal joint	450 ± 250 N/50 mm 600 ± 200 N/50 mm
Dimensional stability	≤ 0,5 %
Permeation of water vapor	1,65E+12 m ² ·Pa·s/kg ± 25%
Vapour difusional resistance Sd	approx. 330 m
Durability: - after artificial ageing, vapour diffusion - chemicals resistance	1,65E+12 m ² ·Pa·s/kg ± 50% acc. to annex A of the standard EN 13970

Compliance with the standard	EN 13707:2004+A2:2009; EN 13970:2004; EN 13970:2004/A1:2006
------------------------------	---

PROPERTIES

- Allows for fixing thermal insulation boards to asphalt adhesive strips on the top side
- In the inverted version, it provides ventilation for damp roofs
- Excellent vapour barrier properties



9-YEARS WARRANTY



FOR DAMP ROOFS

APPLICATION

- Vapour barrier layer on roofs and terraces
- Underlayer ventilation bituminous felt



FOR ROOFS AND TERRACES



VAPOUR BARIER



WELDING

PACKAGING

Poland

- Roll length: 10 m
- Quantity per pallet:
18 rolls (180 m²)

Export

- Roll length: 10 m
- Quantity per pallet:
18 rolls (180 m²)

METHODS OF USE

▪ CONDITIONS OF USE

Making an insulation using **NEXLER Termoklej** bituminous felt should be carried out according to the technical design, in accordance with the current building regulations and the detailed guidelines for the design and execution of insulation contained in NEXLER Insulation Systems and the Technical Data Sheet.

The bituminous felt should be installed in ambient temperatures of above 0°C, this requirement applies to the time of day and night.

Do not carry out insulation work during strong winds and precipitation.

▪ SUBSTRATE PREPARATION

In addition, the substrate should meet the following requirements:

- dry substrate (concrete in an air-dry condition, without any visible traces of moisture or darkening caused by moisture),
- clean substrate (the surface of the concrete is free of loose fractions, dust, oil stains, grease and other impurities),
- smooth substrate (local unevenness and cavities in the surface of concrete do not exceed ± 5 mm),
- even substrate (the gaps between the surface of the substrate and a 4 m long batten placed on the concrete substrate do not exceed 10 mm).

Before welding **NEXLER Termoklej** bituminous felt is recommended to prime concrete substrate with solvent-based bitumen primers for example NEXLER Penetrator G7, or water-based bitumen products for example NEXLER BITFLEX Primer.

▪ PRODUCT CONTROL

The product should not raise any objections. The roll should be evenly rolled, without kinks.

▪ PRODUCT PREPARATION

If it is necessary to make the covering at low ambient temperatures, it is recommended to store the rolls in heated rooms at a temperature of not less than +18°C for 24 hours before installation.

▪ APPLICATION METHOD

Fix the **NEXLER Termoklej** bituminous felt by welding to an old primed bitumen, concrete or galvanised sheet metal substrate. Application should be carried out after the priming agent has completely dried (or cured).

As a result of heating both the substrate and the underside of the bituminous felt with a burner, the thin protective plastic foil melts, the asphalt is slightly melted and the bituminous felt sticks evenly to the substrate. Maintain a bituminous felt overlap min. 8 cm wide along the length of the felt strip and an overlap min. 12 cm wide at the joint perpendicular to the length of the felt strip. An asphalt outflow of approx. 0,5-1 cm in width over the entire length of the welded overlap is required.

NEXLER Termoklej bituminous felt has special bitumen strips on the top side covered with PE foil for fixing thermal insulation boards e.g. EPS boards. Immediately before installing the board, heat the top side of NEXLER Termoklej bituminous felt with a torch to the appropriate degree, melting the PE film and bitumen strips, then place thermal insulation board on the substrate and press it down. The heated asphalt compound on the strips will ensure that the boards adhere to the felt.

When using **NEXLER Termoklej** bituminous felt for a two-layer renovation of an old roof covering, the bituminous felt, as the first layer, should be welded in an inverted position, the felt is bonded to the substrate with melted asphalt from the strips. For damp, impregnated concrete substrate, it is recommended to additionally secure the NEXLER Termoklej bituminous felt with mechanical fasteners with a flat washer at a rate of 3 pcs./m² in addition to welding.

Depending on the degree of dampness, use ventilation chimneys – 1 per 50 - 100 m², then weld a top layer bituminous felt with suitable properties.

▪ CONTROL OF PERFORMANCE

During acceptance, the following should be checked:

- correctness of welding of overlaps – a continuous trickle of melted asphalt mixture on the overlaps is required,
- adhesion of the bituminous felt to the substrate,
- correctness of detail work.

WARRANTY

The manufacturer NEXLER sp. z o.o. provides the direct purchaser of **NEXLER Termoklej** bituminous felt:

- a material warranty of 9 years.

Details of the guarantee provided to the purchaser are contained in the guarantee card.

TOOLS AND TOOL CLEANING

Roofing gas burner, bituminous felt uncoiler.

STORAGE AND TRANSPORT

The rolls of **NEXLER Termoklej** bituminous felt are protected with packing tapes before unrolling. Each roll has a label with the required data on it. The rolls are placed vertically on wooden industrial pallets and foiled.

During transportation and storage, the rolls must be protected from moisture and exposure to sunlight, and be placed upright in one layer in a way preventing any dislocation or damage.

The bituminous felt rolls must be stored on a flat surface at a distance of at least 120 cm from radiators.

Transportation must be carried out in compliance with applicable shipment safety regulations.

NOTES

Works should be carried out in accordance with technical conditions, manufacturer's instructions, health and safety standards and regulations.

Before welding the bituminous felt, take notice of whether the next roll to be rolled out does not differ in the shade of the sprinkle. The sprinkle is a natural raw material and may vary in shade.

IMPORTANT INFORMATION

Please refer to the detailed conditions of use of the product before use.

We guarantee the quality of our materials as part of our terms of sale and delivery.

For buildings with special requirements that are not covered by this manual, we provide our Customers with our own professional advisory service.

The manufacturer has no influence on the improper use of the material, its use for other purposes or under conditions other than those described above. The guarantee only covers the quality of the delivered product. The correct and therefore effective use of the product is not subject to our control.

Neither the manufacturer nor his authorized representative may be held liable for any loss incurred as a result of improper use or storage of the product.

Employees of the company are authorized to provide technical information only and solely in accordance with this Technical Data Sheet. Information other than that contained in this sheet should be confirmed in writing.

If you have any doubts, consult the manufacturer.

CONTACT DETAILS

NEXLER sp. z o.o.

Łużycka 6, 81-537 Gdynia, Poland

tel.: +48 58 712 94 44

www.nexler.com

e-mail: dt@nexler.com


ISSUE DATE

This Technical Data Sheet was issued on 27.02.2025.

Once we have issued a new Technical Data Sheet, this one is no longer valid.


DETAILS

Covering on concrete substrate with thermal insulation

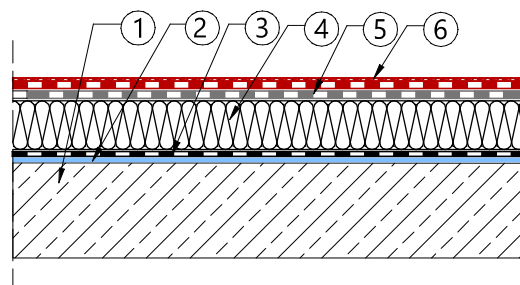

1. Concrete substrate constructed with a slope
2. Bituminous primer NEXLER BITFLEX Primer
3. Vapour barrier **NEXLER Termoklej**
4. EPS thermal insulation boards
5. Underlayer bituminous felt NEXLER MEDIUM PYE G200 S40
6. Top layer bituminous felt NEXLER PREMIUM PYE PV250 S53H

Covering for substrates made of old damp bitumen layers

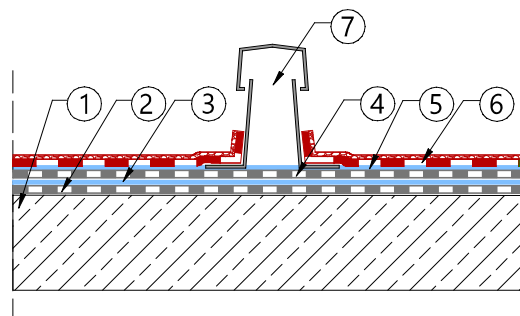

1. Concrete substrate constructed with a slope
2. Old layers of bituminous felts
3. Bituminous primer NEXLER BITFLEX Primer
4. Ventilation chimney
5. Underlayer ventilation bituminous felt **NEXLER Termoklej**
6. Top layer bituminous felt NEXLER PREMIUM PYE PV250 S53H